


Bảng thông số sản phẩm

Thông số kỹ thuật

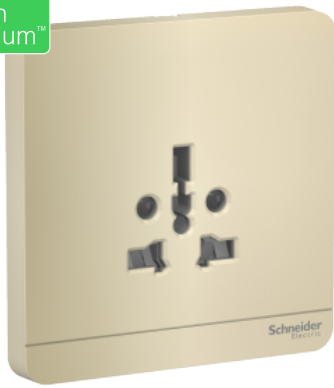

AvatarOn - 16A 250V 1 Gang Universal Socket, white

E83426TS_WG_G19

Main

Product or component type	Socket-outlet
Device presentation	Complete product
Device application	Power supply
Load type	No inductive load
Colour tint	Wine gold
Outlet poles configuration	2P + 3P
Outlet standard	British BS 1363A

Complementary

Rated current	16 A at 250 V AC 50 Hz
Socket number	2
Socket-outlet type	Shuttered
Clamping connection capacity	1 x 4...2 x 4 mm ² for solid cable(s) 1 x 4...2 x 4 mm ² for stranded cable(s) 1 x 2.5...3 x 2.5 mm ² for solid cable(s) 1 x 2.5...3 x 2.5 mm ² for stranded cable(s)
Connections - terminals	Folded terminal
Material	Polycarbonate grid plate Polycarbonate surround
Device mounting	Surface
Width	86 mm
Height	86 mm
Depth	27.5 mm

Environment

IP degree of protection	IP20
Maximum ambient air temperature for operation	45 °C
Ambient air temperature for storage	-5...60 °C
Relative humidity	0...95 %
Environmental characteristic	UV resistant

Standards	IEC 60884
-----------	-----------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.8 cm
Package 1 Width	8.6 cm
Package 1 Length	8.6 cm
Package 1 Weight	103 g
Unit Type of Package 2	BB1
Number of Units in Package 2	60
Package 2 Height	210 cm
Package 2 Width	300 cm
Package 2 Length	395 cm
Package 2 Weight	6950 g

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile

Thay thế được đề xuất