


# Product data sheet

Specifications

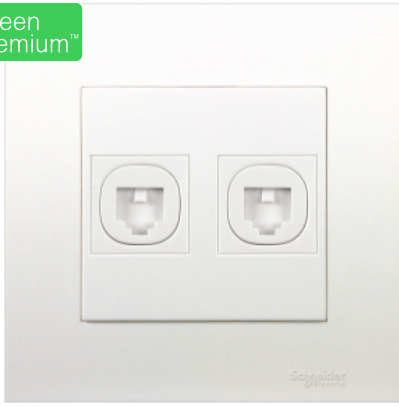

## Telephone socket, Vivace, 2 gang, with shutter, white

KB32TS

### Main

Range of product	Vivace
Range	Vivace
Device short name	KB32
Product or component type	Telephone socket
Device presentation	Complete product
Telephone socket type	RJ11 (8 contacts)
Colour tint	Wall: white

### Complementary

Number of gangs	2 gangs
	White
Connector type	M-110 keystone 8 RJ11 connector
Material	Polycarbonate: surround Polycarbonate: grid plate Polycarbonate: base
Projecting depth	8 mm
Type of cable	2 pairs
Device mounting	Flush
Fixing mode	By 2 screws
Mounting support	Wall mounted
Fixing center	60.3 mm
Embedding depth	28 mm
Surface treatment	Untreated
Surface finish	Untreated
	RJ11 (8 contacts)
Connections - terminals	Clamp terminal
Tightening torque	0.4 N.m
Width	87 mm
Height	87 mm
Depth	35 mm

IP degree of protection	IP20
Main colour tint	White

## Environment

Standards	IEC 60670-1
Ambient air temperature for operation	-5...40 °C
Ambient air temperature for storage	-5...40 °C
Relative humidity	0...95 %
Operating altitude	0...2000 m
Environmental characteristic	Indoor use IP20

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.2 cm
Package 1 Width	8.6 cm
Package 1 Length	8.6 cm
Package 1 Weight	90.99 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	15 cm
Package 2 Width	19 cm
Package 2 Length	10 cm
Package 2 Weight	980 g
Unit Type of Package 3	CAR
Number of Units in Package 3	100
Package 3 Height	21 cm
Package 3 Width	31.5 cm
Package 3 Length	50 cm
Package 3 Weight	9349 g

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

# Contractual warranty

---

Warranty 18 months

Recommended replacement(s)