


# Bảng thông số sản phẩm

Thông số kỹ thuật

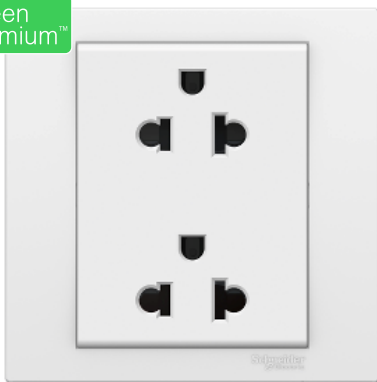

## Vivace-16A 250V double 8 pin universal socket, White

KB426UES2\_WE\_G19

### Main

Range	Vivace
Product or component type	Socket-outlet
Device presentation	Complete mechanism
Outlet standard	Universal
Colour tint	White

### Complementary

Outlet poles configuration	2P + E
Material	Polycarbonate: grid plate Polycarbonate: surround Polycarbonate: base Polycarbonate: cover Brass: socket terminal Steel: folder terminal PA66: shutter
Device mounting	Flush
Mounting support	Wall mounted
Rated current	16 A at 250 V AC, no inductive load
Network frequency	50 Hz
Connections - terminals	Screw terminals
Clamping connection capacity	130 mm <sup>2</sup>
Width	86 mm
Height	86 mm
Depth	27.8 mm

### Environment

Ambient air temperature for operation	-5...35 °C
Relative humidity	0...95 %
Environmental characteristic	Indoor use

### Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
Package 1 Height	3.6 cm
Package 1 Width	8.7 cm
Package 1 Length	8.7 cm
Package 1 Weight	120.0 g
Unit Type of Package 2	BB1
Number of Units in Package 2	9
Package 2 Height	9.5 cm
Package 2 Width	15.0 cm
Package 2 Length	19.0 cm
Package 2 Weight	1.13 kg
Unit Type of Package 3	CAR
Number of Units in Package 3	90
Package 3 Height	21.0 cm
Package 3 Width	31.0 cm
Package 3 Length	50.0 cm
Package 3 Weight	11800.0 g

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

Thay thế được đề xuất