


Product data sheet

Specifications

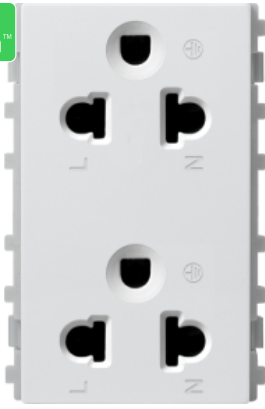

250V 16A Twin Universal 3 Pin Socket 3M Sized Module, White

84426LUES2_WE

Main

Product or component type	Power socket-outlet
Outlet poles configuration	2P + E universal
Load type	Resistive Inductive
Cover plate colour tint	White

Complementary

Device mounting	Surface Flush
Rated current	16 A at 250 V AC 50 Hz
Number of gangs	2 gangs
Marking	L+N
Material	Polycarbonate base Polycarbonate cover
Connections - terminals	Screw terminals
Width	46 mm
Height	70.1 mm
Depth	30.5 mm

Environment

Ambient air temperature for storage	0...60 °C
Ambient air temperature for operation	-5...40 °C
Relative humidity	0...95 %, non-condensing (storage) 10...95 %, non-condensing (operating)
Environmental characteristic	UV resistant indoor use
Operating altitude	2000 m
Standards	IEC 60364 IEC 60884-1
IP degree of protection	IP20 IEC 60364 IEC 60884-1
Product certifications	TISI

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.977 cm
Package 1 Width	7.031 cm
Package 1 Length	4.6 cm
Package 1 Weight	58.8 g
Unit Type of Package 2	BB1
Number of Units in Package 2	8
Package 2 Height	10 cm
Package 2 Width	15.5 cm
Package 2 Length	8 cm
Package 2 Weight	513 g
Unit Type of Package 3	CAR
Number of Units in Package 3	80
Package 3 Height	16.5 cm
Package 3 Width	21 cm
Package 3 Length	40 cm
Package 3 Weight	5090 g

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile

Recommended replacement(s)